

Analysis of Blocking Probability in Noise- and Crosstalk-Impaired All-Optical Networks

Yvan Pointurier¹,
Maité Brandt-Pearce², Suresh Subramaniam³

¹McGill University, Montreal, QC, Canada

²University of Virginia, Charlottesville, VA, USA

³The George Washington University, Washington, DC, USA

May 7, 2007 – INFOCOM – Mini-symposium 3, Session 3

Outline

Introduction

Model

Iterative
technique

Simulation
results

Conclusions
and future
work

- 1 Introduction
- 2 Model
- 3 Iterative technique
- 4 Simulation results
- 5 Conclusions and future work

Outline

Introduction

Model

Iterative
technique

Simulation
results

Conclusions
and future
work

- **Current high-speed optical networks**
 - **Bottleneck due to electrical conversions**
- **Features of all-optical networks**
 - Circuit switched → lightpaths; speed, flexibility, cost
- **New issues arise with all-optical networks**
 - Nodes (OXCs) are subject to crosstalk
 - Node crosstalk is transmitted over extremely long paths without electrical signal regeneration
- **Implementation**
 - Crosstalk issues will be encountered in the near future
- **Motivation**
 - Obtain order of magnitude of call blocking probability in all-optical networks
 - Cross-layer optical network design

Outline

Introduction

Model

Iterative
technique

Simulation
results

Conclusions
and future
work

- Current high-speed optical networks
 - Bottleneck due to electrical conversions
- Features of all-optical networks
 - Circuit switched → lightpaths; speed, flexibility, cost
- New issues arise with all-optical networks
 - Nodes (OXCs) are subject to crosstalk
 - Node crosstalk is transmitted over extremely long paths without electrical signal regeneration
- Implementation
 - Crosstalk issues will be encountered in the near future
- Motivation
 - Obtain order of magnitude of call blocking probability in all-optical networks
 - Cross-layer optical network design

Outline

Introduction

Model

Iterative
technique

Simulation
results

Conclusions
and future
work

- Current high-speed optical networks
 - Bottleneck due to electrical conversions
- Features of all-optical networks
 - Circuit switched → lightpaths; speed, flexibility, cost
- **New issues arise with all-optical networks**
 - **Nodes (OXCs) are subject to crosstalk**
 - **Node crosstalk is transmitted over extremely long paths without electrical signal regeneration**
- Implementation
 - Crosstalk issues will be encountered in the near future
- Motivation
 - Obtain order of magnitude of call blocking probability in all-optical networks
 - Cross-layer optical network design

Outline

Introduction

Model

Iterative
technique

Simulation
results

Conclusions
and future
work

- Current high-speed optical networks
 - Bottleneck due to electrical conversions
- Features of all-optical networks
 - Circuit switched → lightpaths; speed, flexibility, cost
- New issues arise with all-optical networks
 - Nodes (OXCs) are subject to crosstalk
 - Node crosstalk is transmitted over extremely long paths without electrical signal regeneration
- **Implementation**
 - **Crosstalk issues will be encountered in the near future**
- Motivation
 - Obtain order of magnitude of call blocking probability in all-optical networks
 - Cross-layer optical network design

Outline

Introduction

Model

Iterative
technique

Simulation
results

Conclusions
and future
work

- Current high-speed optical networks
 - Bottleneck due to electrical conversions
- Features of all-optical networks
 - Circuit switched → lightpaths; speed, flexibility, cost
- New issues arise with all-optical networks
 - Nodes (OXCs) are subject to crosstalk
 - Node crosstalk is transmitted over extremely long paths without electrical signal regeneration
- Implementation
 - Crosstalk issues will be encountered in the near future
- **Motivation**
 - Obtain order of magnitude of call blocking probability in all-optical networks
 - Cross-layer optical network design

Outline

Introduction

Model


Iterative
technique

Simulation
results

Conclusions
and future
work

Node crosstalk model

[Deng/Subramaniam-Broadnets2004]

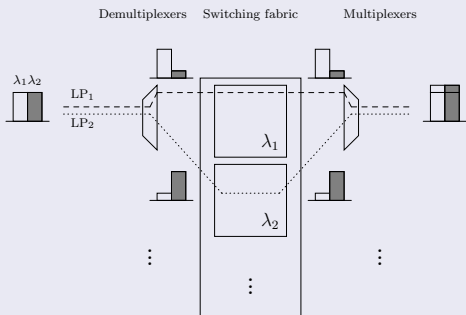

Outline

Introduction

Model

Iterative
technique

Simulation
results

Conclusions
and future
work

- Imperfect demultiplexing
- “Self-crosstalk”
- All channels are equivalent
 - No distinction between adjacent and non-adjacent channels

- Assumptions:
 - fixed routing, random pick wavelength assignment
 - ISI, noise, node demultiplexer crosstalk
 - wavelength equivalence
- Reuse published algorithm for blocking due to the wavelength continuity constraint (wavelength blocking) [Sridharan/Sivarajan-ToN2004]
- QoS extensions are largely independent of the wavelength blocking algorithm

Outline

Introduction

Model

Iterative
technique

Simulation
results

Conclusions
and future
work

- Assumptions:
 - fixed routing, random pick wavelength assignment
 - ISI, noise, node demultiplexer crosstalk
 - wavelength equivalence
- Reuse published algorithm for blocking due to the wavelength continuity constraint (wavelength blocking) [Sridharan/Sivarajan-ToN2004]
- QoS extensions are largely independent of the wavelength blocking algorithm

Outline

Introduction

Model

Iterative
technique

Simulation
results

Conclusions
and future
work

- Assumptions:
 - fixed routing, random pick wavelength assignment
 - ISI, noise, node demultiplexer crosstalk
 - wavelength equivalence
- Reuse published algorithm for blocking due to the wavelength continuity constraint (wavelength blocking) [Sridharan/Sivarajan-ToN2004]
- QoS extensions are largely independent of the wavelength blocking algorithm

Outline

Introduction


Model

Iterative
technique

Simulation
results

Conclusions
and future
work

Iterative technique

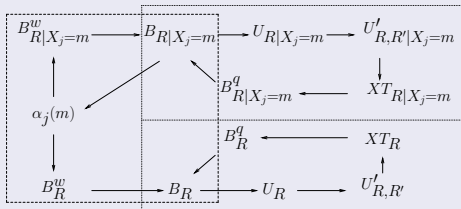

- Dashed box: wavelength blocking – Dotted box: QoS blocking
- X_j = number of free wavelengths on link j
- B_R , B_R^w , B_R^q are blocking probabilities
($B_R = B_R^w + (1 - B_R^w)B_R^q$)
- $\alpha_j(m) =$ state dependent arrival rate

Outline

Introduction


Model

Iterative
technique

Simulation
results

Conclusions
and future
work

Iterative technique

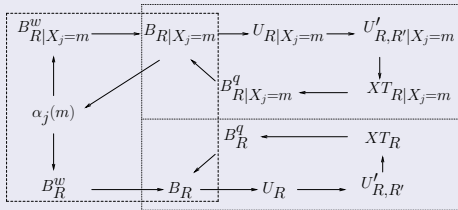

- B_R^w and B_R^q are interdependent
- The respective algorithms to compute B_R^w and B_R^q , though, are largely independent
- There are techniques in the literature to compute B_R^w
 - We reuse one of them to determine B_R^q

Outline

Introduction


Model

Iterative technique

Simulation results

Conclusions and future work

Per-link arrivals

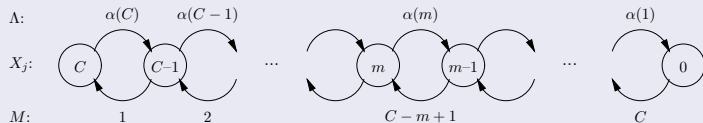

- Birth-death process is known to accurately model link states [Chung/Kasper/Ross-ToN1993]
- X_j = number of free wavelengths on link j
- Λ = arrival rate (parameter of a Poisson distribution)
- M = service rate (parameter of an exponential distribution)

Outline

Introduction


Model

Iterative
technique

Simulation
results

Conclusions
and future
work

Wavelength blocking (overview)

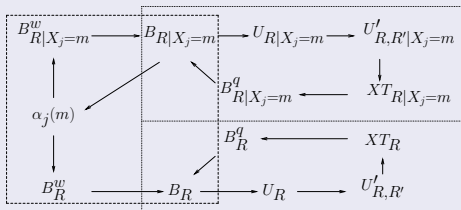

- 2-link correlation and wavelength equivalence assumptions
- $\alpha_j(m) \Rightarrow \Pr(X_j = m) \Rightarrow \beta_{i,j} \Rightarrow g_R(i) \Rightarrow B_R^w$
 - $\beta_{i,j} = \Pr(\text{given set of } i \text{ wavelengths free on link } j)$
 - $g_R(i) = \Pr(\text{given set of } i \text{ wavelengths free on route } R)$
- Conditionals needed because:

$$\alpha_j(m) = \sum_{R:j \in R} \Lambda_R \left(1 - B_{R|X_j=m}^w \right)$$

Outline

Introduction

Model

Iterative
technique

Simulation
results

Conclusions
and future
work

$$B_R \rightarrow U_R \rightarrow U'_{R,R'} \rightarrow XT_R \rightarrow B_R^q \rightarrow B_R$$

- $U_R(k)$ = probability that $k = 0, \dots, C$ calls are established on **exactly** route R
- Establishing a call on R is modeled as a Bernoulli trial with success p_R :

$$p_R = \frac{\Lambda_R}{M_R} \frac{1 - B_R}{C} = \Lambda_R \frac{1 - B_R}{C}$$

- Assuming independence between the trials:

$$U_R(k) \approx \binom{C}{k} p_R^k (1 - p_R)^{C-k}, k = 0, 1, \dots, C.$$

$$B_R \rightarrow U_R \rightarrow U'_{R,R'} \rightarrow XT_R \rightarrow B_R^q \rightarrow B_R$$

- $n_{xt}(R, R')$ = number of common nodes between routes R and R' where crosstalk can occur
 - Recall: crosstalk from R' to R can occur at a node N when R and R' share the link before N and the link after N
- $U'_{R,R'}(k)$ = probability that route R' injects k crosstalk components on route R

$$U'_{R,R'}(n_{xt}(R, R')k) = U_{R'}(k)$$

- $XT_R(k)$ = probability that route R is subject to exactly k crosstalk components

$$XT_R = U'_{R,R_1} * \dots * U'_{R,R_p}$$

Outline

Introduction

Model

Iterative
technique

Simulation
results

Conclusions
and future
work

$$B_R \rightarrow U_R \rightarrow U'_{R,R'} \rightarrow XT_R \rightarrow B_R^q \rightarrow B_R$$

- Q factor for a system with crosstalk:


$$Q_R = \frac{\mu_{1,R} - \mu_{0,R}}{\sigma_{0,R} + \sigma_{1,R}} = \frac{\mu_{1,R} - \mu_{0,R}}{\sigma_{0,R} + \sqrt{\sigma_{i,R}^2 + \sigma_{n,R}^2 + n\sigma_{x,R}^2}}$$

- Maximum number of crosstalks to keep Q below threshold:

$$N_R^{\max} = \left\lfloor \frac{\left(\frac{\mu_1 - \mu_0}{Q_{th}} - \sigma_{0,R} \right)^2 - \sigma_{i,R}^2 - \sigma_{n,R}^2}{\sigma_{x,R}^2} \right\rfloor$$


- QoS blocking:

$$B_R^q = \sum_{k > N_R^{\max}} XT_R(k).$$

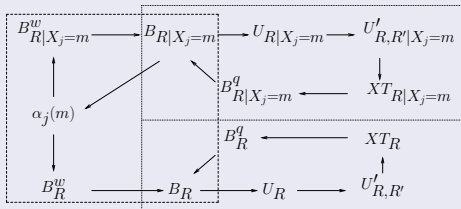


- Computations of the conditionals $U_{R|X_j=m}$, $U'_{R,R'|X_j=m}$, $X^T_{R|X_j=m}$, $B_{R|X_j=m}^q$ are very similar to the computations of U_R , $U'_{R,R'}$, X^T_R , B_R^q .

Mesh-8 topology



NSF topology



Parameters

Description	Value
Span length	70 km
Signal peak power	2 mW
Bit rate	10 Gbps
Nonlinear parameter	2.2 (W.m)^{-1}
Pulse shape	NRZ
Fiber type	SMF
Dispersion	100% post-DC
Min. Q factor	6

Outline

Introduction


Model

Iterative technique

Simulation results

Conclusions and future work

Blocking probability: mesh of 8 nodes

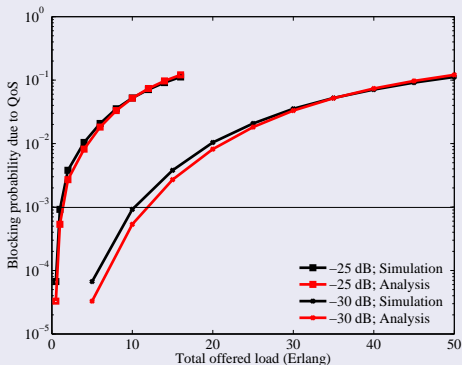

16 wavelengths, -25 dB and -30 dB crosstalk
red: analysis; **black**: simulation

Outline

Introduction


Model

Iterative
technique

Simulation
results


Conclusions
and future
work

Load in gain for the mesh of 8 nodes

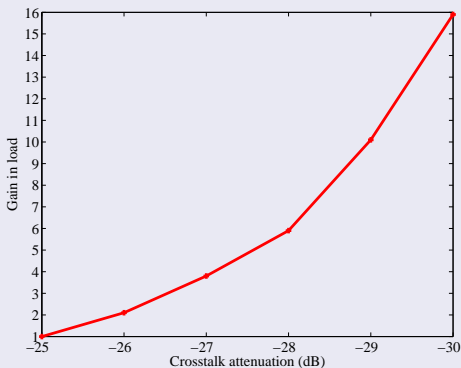

Target average call blocking probability of 0.001
(reference: gain=1 for -25 dB)

Blocking probability: NSF topology

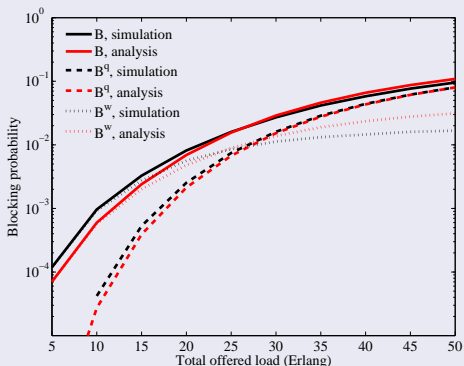

NSF topology, 8 wavelengths, -30 dB crosstalk
red: analysis; **black**: simulation

Outline

Introduction

Model

Iterative
technique

Simulation
results

Conclusions
and future
work

- Physical parameters-dependent impact of crosstalk on network performance
- Extended an algorithm that computes wavelength blocking, to include QoS blocking
 - But our work is independent of the wavelength blocking calculations algorithm
- Leads for future work
 - Adjacent vs. non-adjacent channel crosstalk
 - Other impairments (PMD, ...)
- Questions ?

Outline

Introduction

Model

Iterative
technique

Simulation
results

Conclusions
and future
work